


Ruelco

Sand Probe Relay

Model 1S04

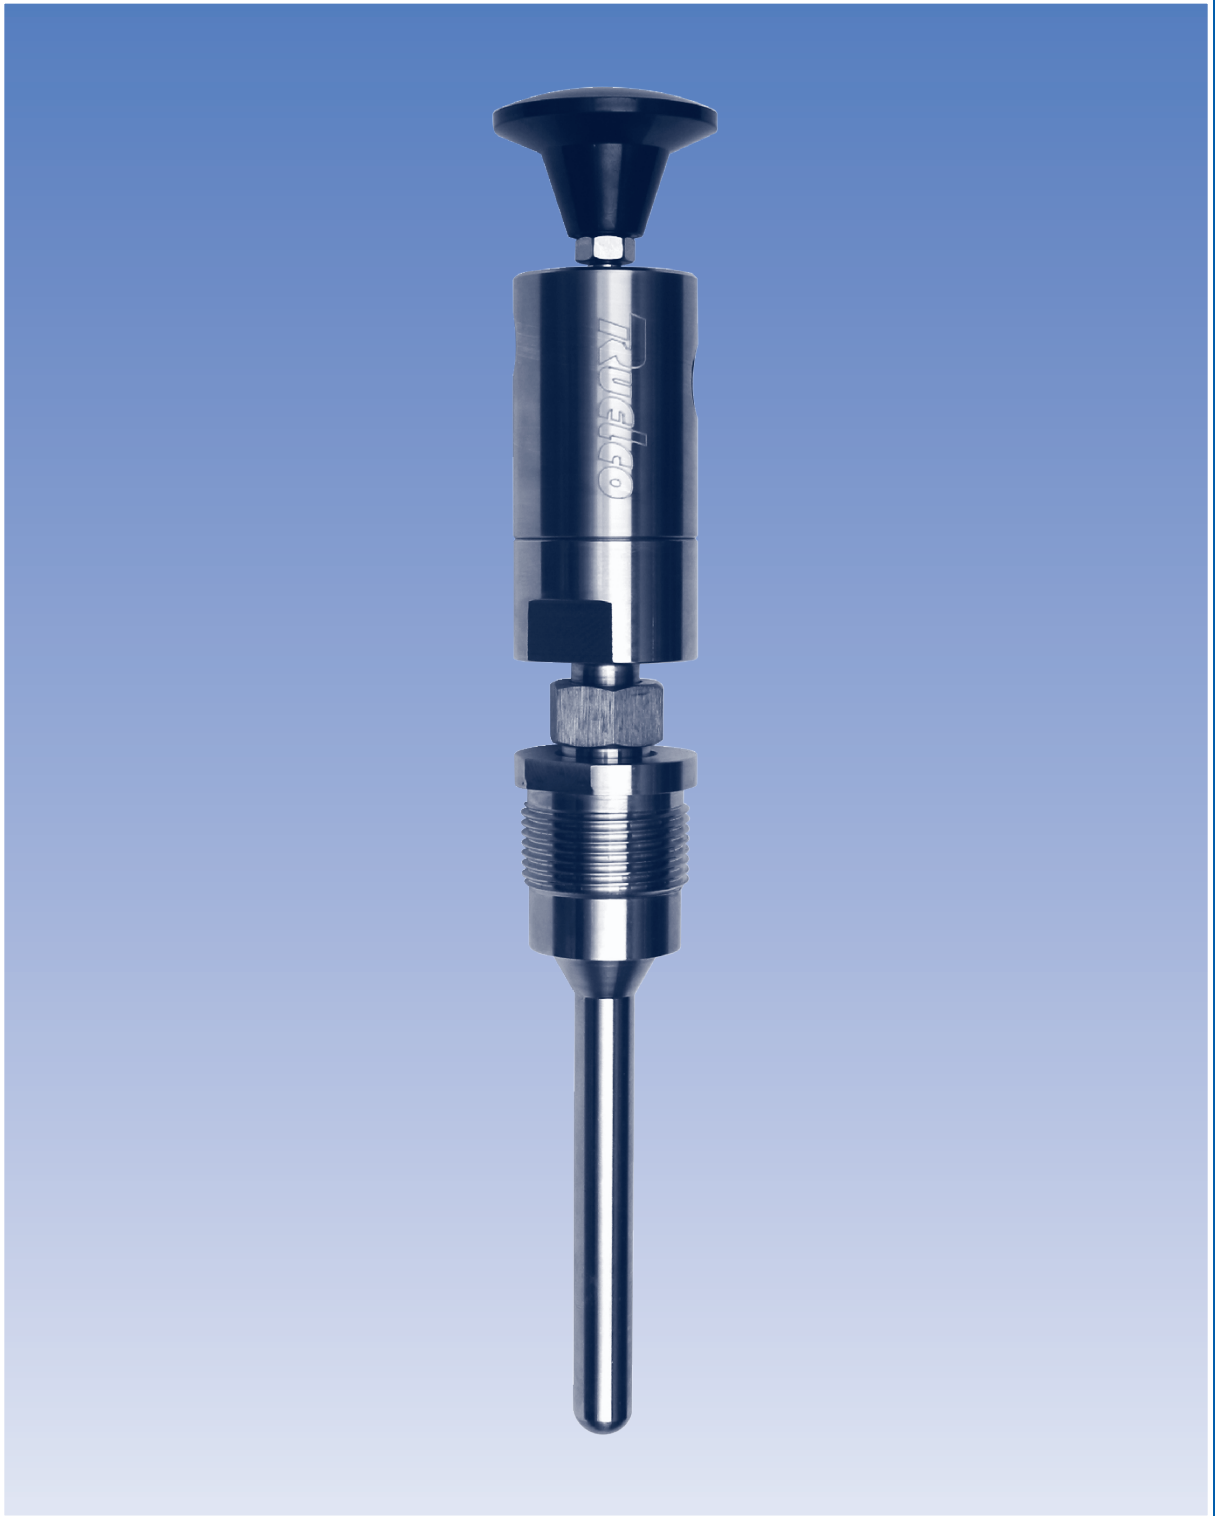

1-800-229-7835
ruelco@ruelco.com

Sand Probe Relay


Model IS04

FEATURES

- 316 stainless steel construction (models to N.A.C.E. MR0175 available)
- Will operate with flowline pressures as high as 15,000 PSI.
- Viton O-rings are utilized for dependability
- "Red band" on shaft provides visual indication that sand probe relay has operated
- Knob provided for manual testing
- Probes for 2" to 4" inch pipe available

GENERAL DESCRIPTION:

The Ruelco high pressure sand probe relay utilizes a thin wall steel probe installed directly in the flowline to detect and indicate that excessive erosion or corrosion has occurred. It is installed directly into a 15,000 psi. flowline using the 1" medium pressure connection. The relay utilizes a reliable 3-way valve that will bleed off an instrumentation signal and provide visual indication that the probe has lost pressure integrity. This alerts field personnel that inspection of the flowline and possible repair may be required.

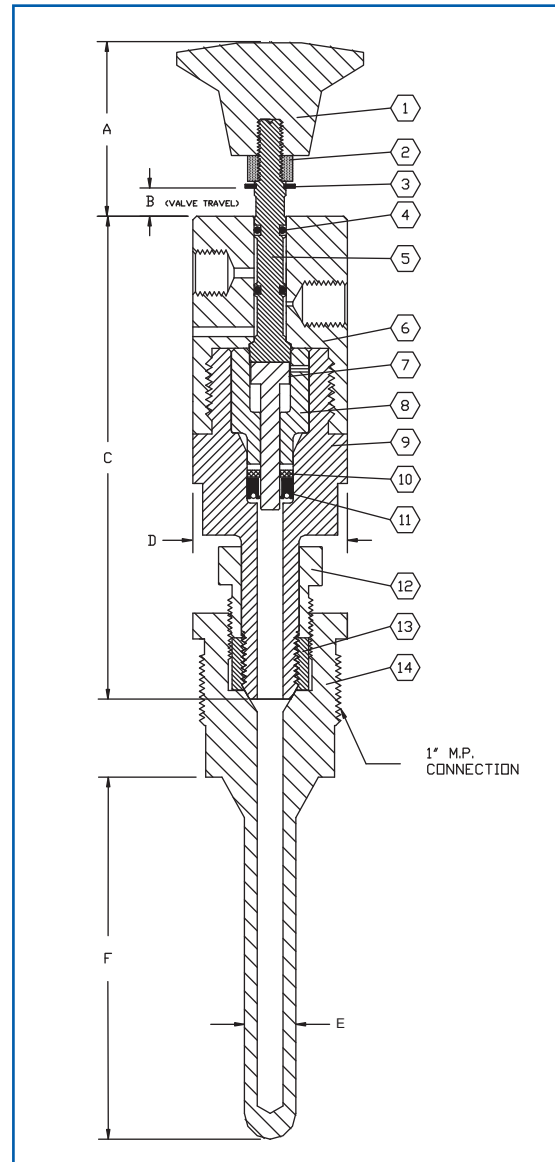


Parts List For Sand Probe Relay

Item	Qty.	Description	Material	Part No.
1	1	Knob	Phenolic	Z0-200-001
2	1	Lock Nut	AISI 316 St. Stl.	T6-08K-0F3
3	1	Snap Ring	5 - 17 St. Stl.	S5-8H00031
4	2	Shaft O-Ring	Viton	V0-008-75T
5	1	Shaft	AISI 316 St. Stl.	1S-012-000
6	1	Valve Body	AISI 316 St. Stl.	1S-011-000
7	1	Piston	AISI 17-4 St. Stl.	42-020-000
8	1	Sleeve	AISI 17-4 St. Stl.	42-021-0A0
9	1	H.P. Base	AISI 17-4 St. Stl.	1S-013-000
10	1	Backup Ring	Teflon	42-010-0B0
11	1	Piston Seal	Viton	VP-201-75H
12	1	Gland Nut	AISI	42-022-000
13	1	Collar	AISI	42-023-000
14	1	20k Sand Probe	See Chart	1S-010-XXX*
15	-	Repair Kit	Items 3, 4, 10 & 11	1S-014-000

* USE LAST THREE (3) DIGITS OF SAND PROBE ORDER CODE SHOWN BELOW

Ordering Code: IS04 X 5 X X X N

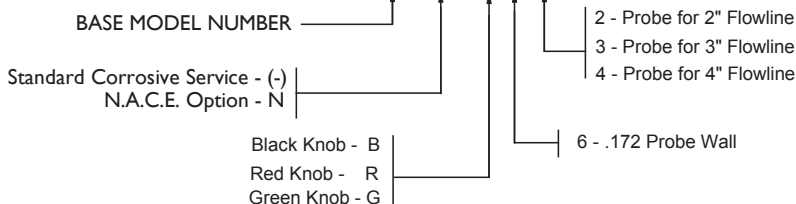

Dimensions Inch (MM)

A	1.69 (43)
B	.28 (7.1)
C	4.68 (118.8)
D	1.50 (38.1)
Probe Wall	.172 Wall (4.37)
E	.50 (12.7)
F (2" Pipe Size)	3.16 (80.2)
F (3" Pipe Size)	3.72 (94.5)
F (4" Pipe Size)	4.22 (107.2)

Specifications P.S.I. (BAR)

Valve Body Max. W.P.	150 (10.3)
Probe Operation Range	100 (6.7) min. 15,000 (1035) max.
Ambient Temperature Range	-20° To 250° F -29° To 122° C
Cv Factor	.34